



行远国际
FORESIGHT(DF) INTERNATIONAL

泓信特钢
HONGXIN SPECIAL STEEL




”

用服务与真诚来换取您的信任与支持，
互惠互利，共创双赢！

Achieved mutual benefit, create a win-win situation with service and
sincerity in exchange for your trust and support



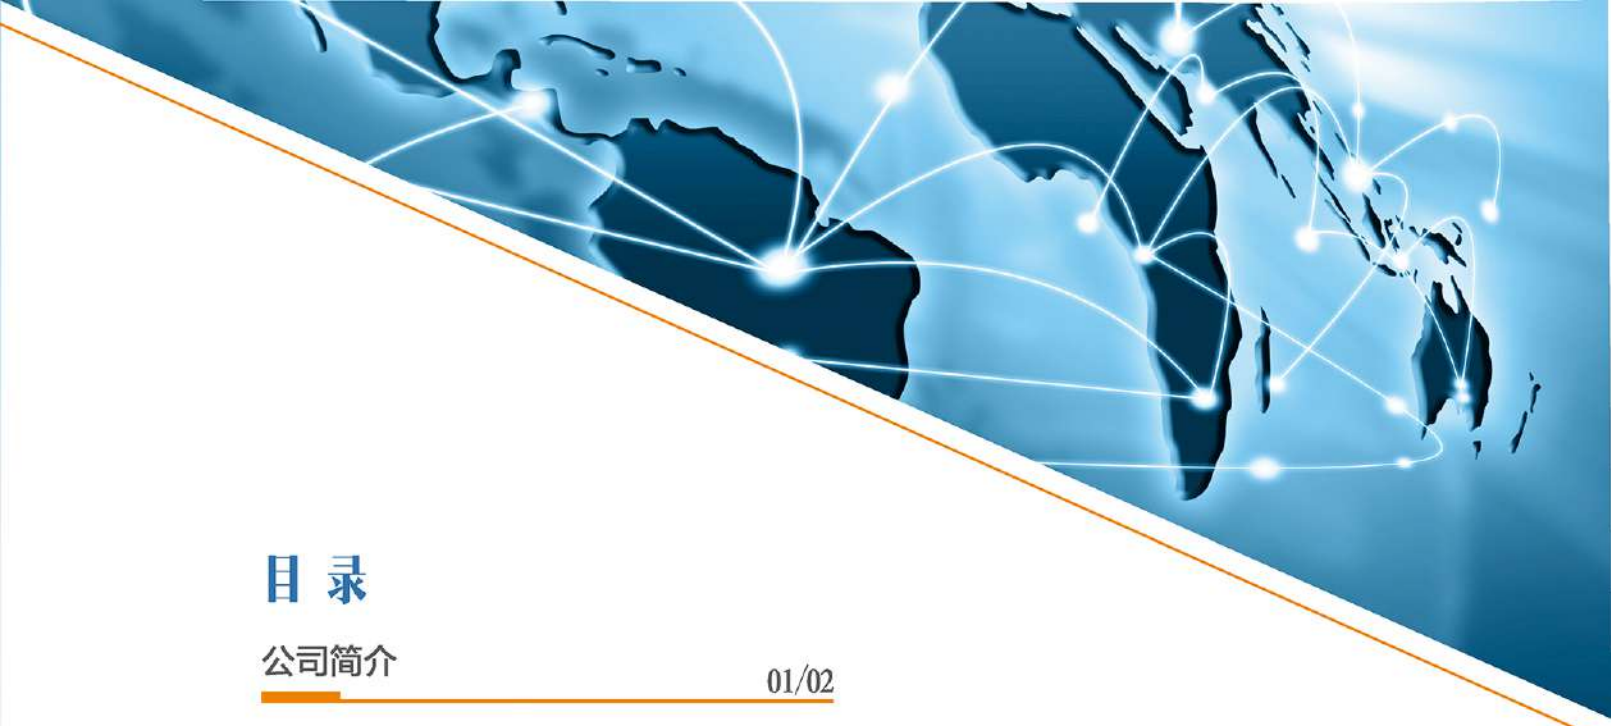

目 录

公司简介	01/02
企业文化	03
材料板块	04/18
精加工产业	19/30
应用领域	31
我们的服务	32/41
公司资质	42/43

CONTENTS

COMPANY PROFILE	01/02
ENTERPRISE CULTURE	03
MATERIAL PLATE	04/18
FINISHING INDUSTRY	19/30
APPLICATION FIELD	31
SERVICE	32/41
QUALIFICATION	42/43



大连市行远国际贸易有限公司（DF）坐落于美丽的滨海城市-大连，注册资金1000万元人民币，公司创始人拥有丰富的金属材料从业经验，公司依托强大的人才实力和自身行业资源优势，建立起了一套完备的进出口营销体系。

行远国际是全球化、专业化、最值得信赖的钢铁国际供应链服务商。主要经营高速钢、工模具钢、不锈钢等特殊钢产品类型，产品广泛应用于航空、汽车、石油化工、医疗器械、机械制造加工、核电、新能源等不同领域，畅销德国、意大利、西班牙、波兰、土耳其、日韩、巴西、印度、及东南亚多个国家。公司通过ISO9001质量管理体系认证，是具质量管理体系资质及产品质量跟踪检测为一体的贸易服务型企业。另通过香港分公司建立了全球化的供应体系，扩大国际采销业务范畴。

为了扩展行远国际的产业链条，优化对国内外客户的服务质量。行远国际于2017年投资成立深圳泓信特钢有限公司，固定资产1000余万元，是一家从事模具钢加工、销售和定制研发的专业化公司，加工设备齐全，拥有数控锯床，龙门铣，侧边铣，双头铣，高精度磨床等20余台先进的精密设备。公司位于深圳市龙华区观澜街道华朗嘉工业园区第3栋，主要经营以东北特钢集团，抚顺特殊钢股份有限公司产品为原材料的各种精加工产品。公司车间设有原材料部，精加工部，质检部，包装发货部。

行远国际与中国国内各大知名生产制造商保持紧密合作，并获得东北特钢集团国贸公司授权越南市场指定代理商，抚顺特钢授权经销商。行远国际牢记以质量求生存、凭诚信走天下的企训，以苛刻的质量要求致力于提供卓越的产品、贴身的服务，切实做到“行之有效，远见卓识”。



DALIAN FORESIGHT(DF) INTERNATIONAL TRADE CO.,LTD . is located in the beautiful coastal city of Dalian with a registered capital of 10 million RMB. The founder of the company has rich experience in metal material industry. Relying on the strong talent strength and the advantages of its own industry resources, the company has established a complete set of import and export marketing system.

DF INTERNATIONAL TRADE CO.,LTD . is a global, professional, and most reliable steel international supply chain service provider. The business operation of DF relates to high-speed steel, tool and die steel, stainless steel and other special steel products, which are widely used in the categories of aviation, automobile, petrochemical engineering, medical equipment, machinery processing, nuclear power, new energy and sell well in Germany, Italy, Spain, Russia, Poland, Turkey, Japan, South Korea, Brazil, India, southeast Asian countries. The company has acquired ISO9001 quality management system certification, which enables DF to be a rare trade service enterprise with both quality management system and production quality tracking and testing system. In addition, a global supply system has been established through the Hong Kong branch to expand the scope of international procurement and sales business.

In order to expand the international industrial chain, optimize the quality of service to domestic and foreign customers. In 2017, Xingyuan International invested and established Shenzhen Hongxin Special Steel Co., LTD., with fixed assets of more than 10 million yuan. It is a professional company engaged in mold steel processing, sales and customized research and development, with complete processing equipment, CNC saw machine, gantry milling, side milling, double head milling, high-precision grinding machine and more than 20 sets of advanced precision equipment. The company is located in Shenzhen Longhua District Guanlan Street Hualangjia Industrial Park building 3, mainly engaged in the northeast special Steel group, Fushun special Steel Co., Ltd. products as raw materials for all kinds of finishing products. The company has a workshop of raw material department, finishing department, quality control department, packaging department.

DF keeps close cooperation with many well-known manufacturers in China, authorized by FUSHUN SPECIAL STEEL CO., LTD as sale dealers,also authorized by DONGBEI SPECIAL STEEL GROUP CO., LTD. to operate in Vietnam market as an appointed agent. DF always keeps the enterprise training in mind, which is strive for survival on the basis of quality to lead the world by good faith, devotes itself to provide excellent products and service through highly-strict quality requirements to truly achieve "effective and foresight".

行远国际立志成为

全球化、专业化、值得信赖的钢铁国际供应链服务商之一

使命

MISSION

愿景

VISION

价值
理念

VALUE


Build a customers' favorite service provider in steel industry with global competitiveness by sticking to the values of integrity and excellence.



工艺流程 MANUFACTURING PROCESS


普通轧材和锻材

Conventional Rolled and Forged Bars

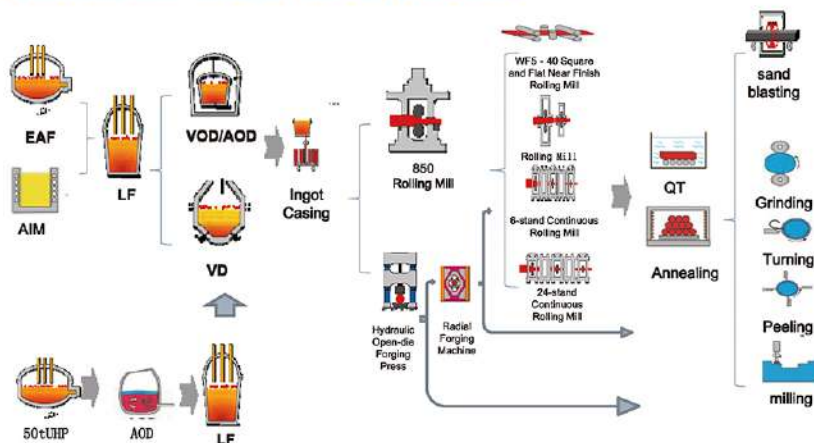


电渣轧材和锻材

ESR Rolled and Forged Bars

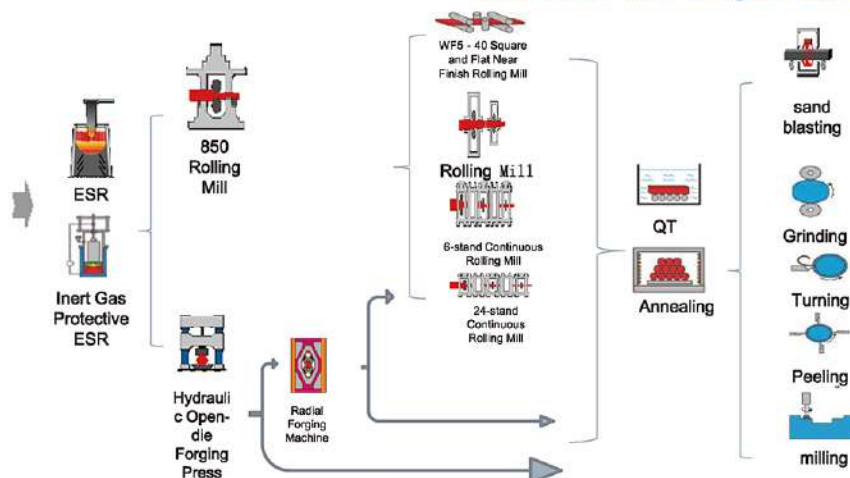

双真空轧材和锻材

VIM+VAR Rolled and Forged Bars

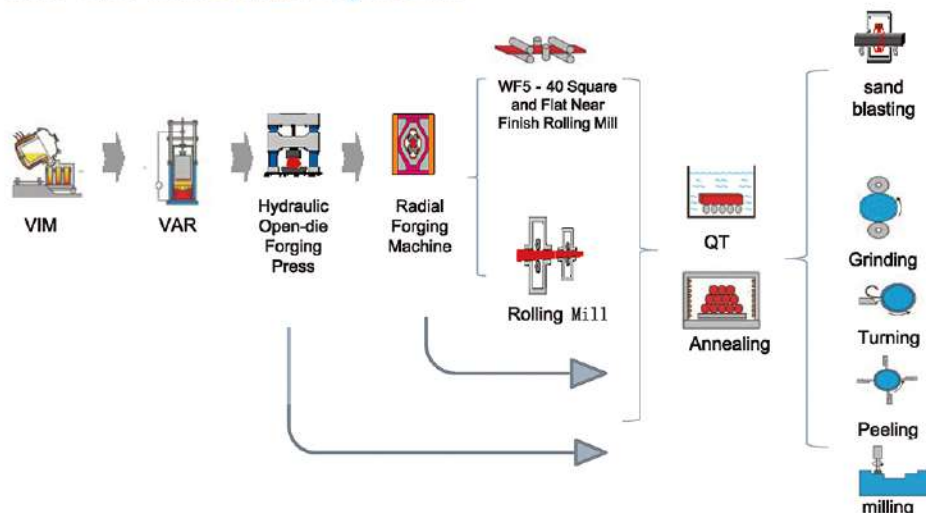

合格供应商设备 QUALIFIED SUPPLIER EQUIPMENT



转炉
CONVERTER



线材生产线
WIRE ROD LINE



110MT 电炉
110MT EAF




RH 精炼炉
RH REFINING FURNACE

合格供应商设备 QUALIFIED SUPPLIER EQUIPMENT



电渣炉
ESR

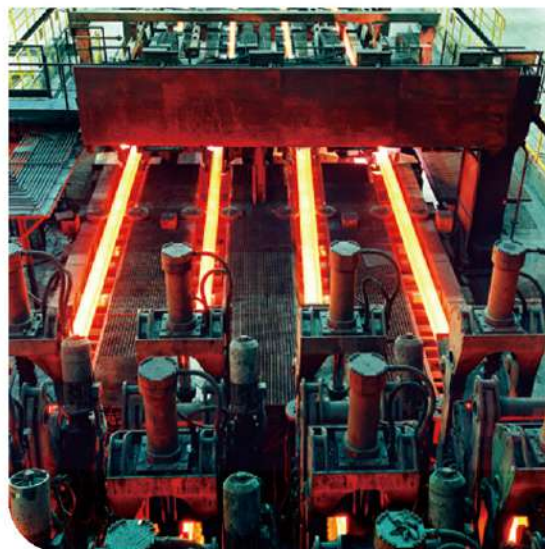

连轧线
CONTINUOUS CASTING LINE



扁钢生产线
FLAT STEEL ROLLING



钢丝
COLD DRAWING LINE

合格供应商设备 QUALIFIED SUPPLIER EQUIPMENT



16MN 精锻机
16MN PRECISION FORGING MACHINE



35MN 快锻机
35MN QUICK FORGING MACHINE



80MN 锻机
80MN FORGING MACHINE



井式调质生产线
WELL ROLLER-TYPE QT LINE FOR FLATS

合格供应商设备 QUALIFIED SUPPLIER EQUIPMENT



圆钢剥皮机
ROUND BAR PEELING MACHINE



圆锯机
CIRCULAR SAW



台车式调质生产线
TROLLEY-TYPE QT LINE



退火炉
ANNEALING CENTER

TOOL AND DIE STEEL NORMAL PRODUCT CATALOG

GATEGOTY	TYPICAL STEEL GRADES
High Speed Steel	M2, M3, M35, M42, W4, W9, T1
Tool and Die Steel	1.2080, 1.2083, 1.2101, 1.2210, 1.2311, 1.2312, 1.2316, 1.2343, 1.2344(EFS), 1.2345MOD, 1.2367, 1.2379, 1.2390M, 1.2391, 1.2436, 1.2493, 1.2510, 1.2550, 1.2631, 1.2714, 1.2738, 1.2842, 1.3343, 1.4112, 1.2888
	SKD11, SKD61, SKS3, SKT4, NC6, NC10, PGK
	D2, D3, D6, DC53-S, DT413, A2, A8MOD, H11, H12, H13, H21, S5, S7, O1, O2, L2, L6
	718, 9SiCr, P20, 440C, 420
Stainless Steel	304, 304L, 316, 316L, 20Cr13, 410, 416, 420, 430, 409Ni, 440C
Alloy Structural Steel	18CrNiMo7-6, C45+N, 16MnCrS5, 20MnCr5, S355J2G3+N, SAE1141, SAE1541, 42CRMoS4+QT, 16/20MnCr5
SHAPE	SIZE(mm)
Hot Rolled Round Bars	8— 87
Forged Round Bars	60-1000
Hot Rolled Flat Bars	6-150X60-860
Forged Flat Bars	100-1200X350-1800
Sheets	1.2-10 × 600-800 × 1200-2000
Strips	0.03-6.0 x 30-400
Wire Rods	1.0-20
Melting Facilities	BF, EAF, LF, VD, VOD, AOD, ESR, VIM, VAR
Heat Treatment	Annealed, Normalized, Quenched & Tempered, Pre-hardened,
Surface machining	Ground, Peeled, Rough Turned, Polished, Sand Blasting(Flat Bar)

尺寸与公差 SIZE AND TOLERANCE

扁钢 (FLAT BAR)

WIDTH	WIDTH TOLERANCE	THICKNESS AND TOLERANCE								
		10~ < 20	20~ < 30	30~ < 40	40~ < 50	50~ < 60	60~ < 70	70~ < 80	80~ < 90	90~ ≤ 100
40~ < 60	±0.6	±0.3	±0.3	±0.35	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9
60~ < 80	±0.7	±0.3	±0.35	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0
80~ < 100	±0.8	±0.35	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.0
100~ < 120	±1.0	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.0	±1.0
120~ < 140	±1.2	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.0	±1.1
140~ < 160	±1.4	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.1	±1.1
160~ < 180	±1.5	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.1	±1.1	±1.2
180~ < 200	±1.6	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.1	±1.2	±1.2
200~ < 250	±1.7	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.2	±1.2	±1.2
250~ < 305	±1.8	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.2	±1.2	±1.2
305~ ≤ 310	±1.8	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	±1.2	±1.2	±1.2

WIDTH TOLERANCE		300~350	>350~400	>400~600	>600~910
		0~+6	0~+7	0~+8	0~+10
THICKNESS AND TOLERANCE	6~15	0~+1.5	0~+1.5	0~+1.6	0~+1.6
	>15~40	0~+1.6	0~+1.6	0~+1.7	0~+1.7
	>40~80	0~+1.7	0~+1.7	0~+1.8	0~+1.8
	>80~120	0~+1.8	0~+1.8	0~+1.9	0~+1.9
	>120~180	0~+2.0	0~+2.0	0~+2.2	0~+2.2
	>180~240	0~+2.3	0~+2.3	0~+2.4	0~+2.4
	>240~300	0~+2.5	0~+2.5	0~+2.5	0~+2.5

尺寸与公差 SIZE AND TOLERANCE

圆钢 (ROUND BAR)

DIN 1013

Diameter mm	Tolerance mm
8 - 15	+/-0.40
16 - 25	+/-0.50
26 - 35	+/-0.60
36 - 50	+/-0.80
51 - 80	+/-1.00
81 - 100	+/-1.30
101 - 120	+/-1.50
121 - 160	+/-2.00
161 - 200	+/-2.50

ISO H TOLERANCES

Diameter mm	h6	h7	h8	h9	h10	h11	h12
up to & incl 3	-0.006/+0	-0.010/+0	-0.014/+0	-0.025/+0	-0.040/+0	-0.060/+0	-0.100/+0
3 < 6	-0.008/+0	-0.012/+0	-0.018/+0	-0.030/+0	-0.048/+0	-0.075/+0	-0.120/+0
6 < 10	-0.009/+0	-0.015/+0	-0.022/+0	-0.036/+0	-0.058/+0	-0.090/+0	-0.150/+0
10 < 18	-0.011/+0	-0.018/+0	-0.027/+0	-0.043/+0	-0.070/+0	-0.110/+0	-0.180/+0
18 < 30	-0.013/+0	-0.021/+0	-0.033/+0	-0.052/+0	-0.084/+0	-0.130/+0	-0.210/+0
30 < 50	-0.016/+0	-0.025/+0	-0.039/+0	-0.062/+0	-0.100/+0	-0.160/+0	-0.250/+0
50 < 80	-0.019/+0	-0.030/+0	-0.046/+0	-0.074/+0	-0.120/+0	-0.190/+0	-0.300/+0
80 < 120	-0.022/+0	-0.035/+0	-0.054/+0	-0.087/+0	-0.140/+0	-0.220/+0	-0.350/+0
120 < 180	-0.025/+0	-0.040/+0	-0.063/+0	-0.100/+0	-0.160/+0	-0.250/+0	-0.400/+0
180 < 250	-0.029/+0	-0.046/+0	-0.072/+0	-0.115/+0	-0.185/+0	-0.290/+0	-0.460/+0
250 < 315	-0.032/+0	-0.052/+0	-0.081/+0	-0.130/+0	-0.210/+0	-0.320/+0	-0.520/+0

ISO h-tolerances are always minus tolerances.

尺寸与公差 SIZE AND TOLERANCE

圆钢 (ROUND BAR)


ASTM A484/A484M	
Diameter mm	Tolerance mm
8 > 11	+/-0.15
11 > 15.5	+/-0.18
15.5 > 22	+/-0.20
22 > 25	+/-0.23
25 > 28	+/-0.25
28 > 31.5	+/-0.28
31.5 > 34.5	+/-0.30
34.5 > 38	+/-0.35
38 > 50	+0.40/-0
50 > 63	+0.80/-0
63 > 90	+1.20/-0
90 > 115	+1.60/-0
115 > 140	+2.00/-0
140 > 165	+3.00/-0
165 > 200	+4.00/-0
200 > 300	+4.80/-0
300 > 400	+5.50/-0
400 > 625	+6.50/-0

工模具钢 DIE AND TOOL STEEL


常见品种 REGULAR GRADE

TYPE	GRADE				MAIN CHEMICAL COMPOSITION								
	GB	ASTM	DIN	JIS	C	Cr	Mo	V	Si	S	P	Mn	NI
COLD WORK	Cr12	D3	1.2080	SKD1	1.90~ 2.20	11.50~ 13.00			≤ 0.40	≤ 0.025	≤ 0.025		
	Cr12MoV				1.45~ 1.70	11.00~ 12.50	0.40~ 0.60	0.15~ 0.30	≤ 0.40	≤ 0.030	≤ 0.030		
	Cr12Mo1V			SKD11	1.45~ 1.70	11.50~ 13.00	0.70~ 1.20	0.20~ 0.50	≤ 0.40	≤ 0.030	≤ 0.030		
	Cr12Mo1V1	D2	1.2379		1.50~ 1.60	11.00~ 12.50	0.70~ 1.20	0.90~ 1.10	≤ 0.40	≤ 0.030	≤ 0.030		
	Cr12Mo1V4	D7			2.15~ 2.50	11.50~ 13.50	0.70~ 1.20	3.80~ 4.40	0.10~ 0.60	≤ 0.030	≤ 0.030		
	90Mn2V	O2	1.2842		0.85~ 0.95	0.20~ 0.50		0.05~ 0.20	0.10~ 0.40	≤ 0.030	≤ 0.030	1.80~ 2.20	
	Cr5Mo1V	A2		SKD12	0.95~ 1.05	4.75~ 5.00	≤ 2.0	≤ 0.40	0.20~ 0.40			0.45~ 0.75	
	9CrWMn	O1	1.2510	SK53	0.90~ 1.05	0.50~ 0.70		0.05~ 0.15	0.15~ 0.35	≤ 0.035	≤ 0.035	1.00~ 1.20	
HOT WORK	DF01				0.55~ 0.65	4.50~ 4.90	3.40~ 3.80	1.15~ 1.40	0.25~ 0.55	≤ 0.005	≤ 0.020		
	DF02				0.38~ 0.50	5.10~ 6.20	0.90~ 1.35	1.12~ 1.40	1.10~ 1.40	≤ 0.010	≤ 0.020	≤ 0.45	
	4Cr5MoSiV1	H13	1.2344	SKD61	0.32~ 0.45	4.75~ 5.50	1.10~ 1.50	0.80~ 1.20	0.80~ 1.20	≤ 0.010	≤ 0.020		
	4Cr5MoSiV	H11	1.2343	SKD6	0.33~ 0.43	4.75~ 5.50	1.10~ 1.60	0.30~ 0.60	0.80~ 1.25	≤ 0.030	≤ 0.030	0.20~ 0.60	
PLASTIC DIE STEEL	10Ni3MnCuAl			NAK80	0.05~ 0.25	≤0.30	0.20~ 0.50		≤ 0.35	≤ 0.030	≤ 0.030	1.40~ 1.70	2.80~ 3.40
	3Cr2MnNiMo	P20+Ni	1.2738		0.35~ 0.45	1.80~ 2.10	0.15~ 0.25		0.20~ 0.40	≤ 0.010	≤ 0.025	1.30~ 1.50	0.90~ 1.20
	4Cr13		1.4031		0.35~ 0.42	12.50~ 13.50			≤ 0.60	≤ 0.010	≤ 0.025	≤ 0.80	
	56NiCrMoV7		1.2714		0.50~ 0.60	1.00~ 1.30	0.45~ 0.55	0.07~ 0.12	0.10~ 0.40	≤ 0.030	≤ 0.030	0.65~ 0.95	1.50~ 1.80
STAINLESS STEEL	0Cr18Ni9	304	1.4301	SUS304	≤ 0.07	17.00~ 19.00			≤ 1.00	≤ 0.030	≤ 0.035	≤ 2.00	8.00~ 10.00
	00Cr19Ni10	304L	1.4306	SUS304L	≤ 0.030	18.00~ 20.00			≤ 1.00	≤ 0.030	≤ 0.035	≤ 2.00	8.00~ 10.00
	0Cr17Ni12Mo2	316	1.4401	SUS316	≤ 0.080	16.00~ 18.50	2.00~ 3.00		≤ 1.00	≤ 0.030	≤ 0.035	≤ 2.00	10.00~ 14.00
	00Cr17Ni14Mo7	316L	1.4404	SUS316L	≤ 0.030	16.00~ 18.00	2.00~ 3.00		≤ 1.00	≤ 0.030	≤ 0.035	≤ 2.00	12.00~ 15.00
	1Cr13	410	1.4006	SUS410	≤ 0.15	11.50~ 13.50			≤ 1.00	≤ 0.030	≤ 0.035	≤ 1.00	
	2Cr13	420	1.4021	SUS420	0.16~ 0.25	12.00~ 14.00			≤ 1.00	≤ 0.030	≤ 0.035	≤ 1.00	
	1Cr17	430	1.4016	SUS430	≤ 0.12	16.00~ 18.00			≤ 0.75	≤ 0.030	≤ 0.035	≤ 1.25	

工模具钢 DIE AND TOOL STEEL

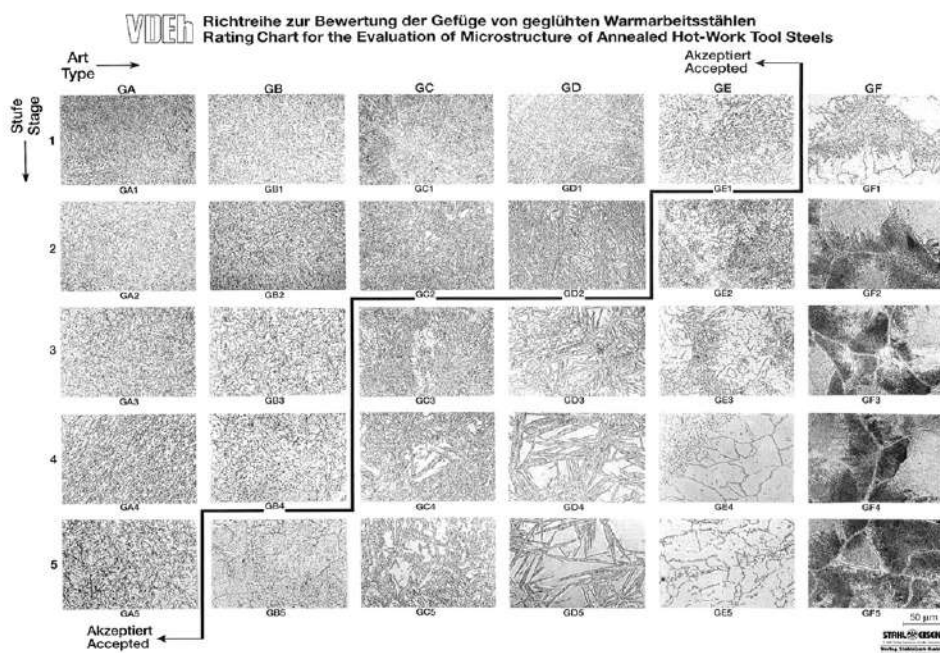


H13系列球化退火组织评级图

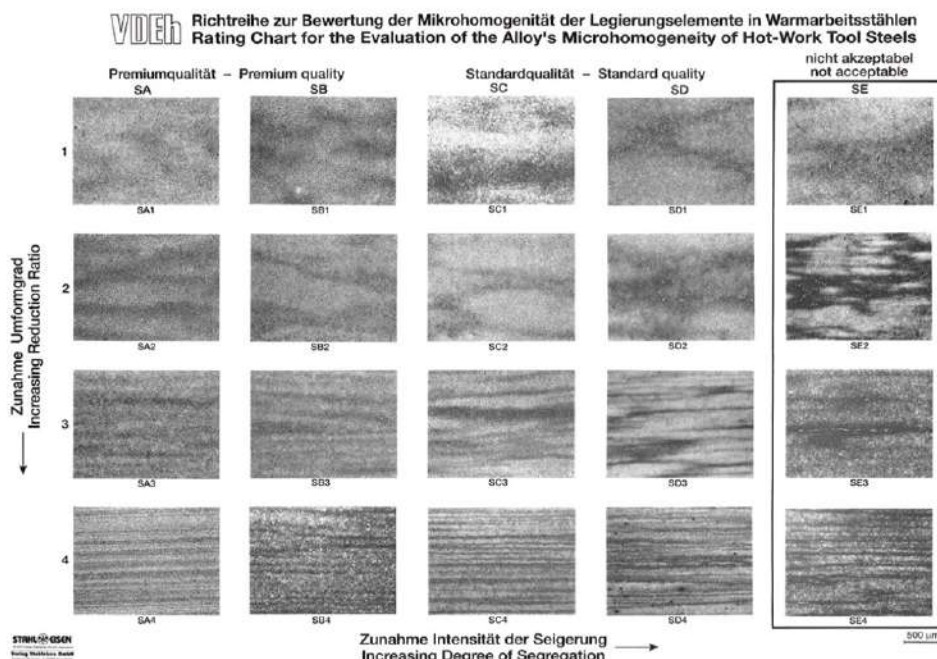



带状组织评级图

高速工具钢 HIGH SPEED STEEL

Steel Type						Main Chemical Composition					
Category	Similar Grade					C	Cr	W	Mo	V	Co
	DF GRADE	GB9943	ISO 4957	AISI	JIS						
DF High Performance	M2T	W6Mo5Cr4V2				0.83~0.90	3.85~4.40	5.65~6.75	4.65~5.50	1.80~2.20	—
	CM2T	CW6Mo5Cr4V2	HS6-5-2C	CM2		0.86~0.90	3.85~4.20	5.90~6.30	4.80~5.20	1.85~2.10	—
	M2T+	/				0.86~0.90	3.85~4.40	5.80~6.50	4.70~5.50	1.75~2.20	0.80~1.20
	M42T	W2Mo9Cr4VCo8				1.05~1.15	3.50~4.25	1.15~1.85	9.00~10.00	0.95~1.35	7.75~8.75
	M35T	W6Mo5Cr4V2Co5				0.89~0.95	3.80~4.50	6.00~6.70	4.80~5.20	1.75~2.10	4.50~5.50
DF Normal Type	W4	W4Mo3Cr4VSi				0.83~0.93	3.80~4.40	3.50~4.50	2.50~3.50	1.20~1.80	—
	M2	W6Mo5Cr4V2	HS6-5-2	M2	SKH51	0.82~0.90	3.80~4.40	5.50~6.75	4.50~5.50	1.75~2.20	—
	M35	W6Mo5Cr4V2Co5	HS6-5-2-5	M35	SKH55	0.87~0.95	3.80~4.50	5.90~6.70	4.70~5.20	1.70~2.10	4.50~5.50
	M42	W2Mo9Cr4VCo8	HS2-9-1-8	M42	SKH59	1.05~1.15	3.50~4.25	1.15~1.85	9.00~10.00	0.95~1.35	7.75~8.75
	W9	W9Mo3Cr4V				0.77~0.87	3.80~4.40	8.50~9.50	2.70~3.30	1.30~1.70	—
	W18	W18Cr4V	HS18-0-1	T1	SKH2	0.73~0.83	3.80~4.50	17.20~18.70	—	1.00~1.20	—
	M7	W2Mo9Cr4V2	HS2-9-2	M7	SKH58	0.95~1.05	3.50~4.50	1.50~2.10	8.20~9.20	1.75~2.20	—
	M1	W2Mo9Cr4V				0.78~0.88	3.50~4.00	1.40~2.10	8.20~9.20	1.00~1.35	—
	M3-I	CW6Mo5Cr4V3	HS6-5-3C			1.05~1.10	3.80~4.50	5.00~6.70	4.70~5.20	2.25~2.75	—
	M3-II	W6Mo5Cr4V3	HS6-5-3	M3-2	SKH53	1.15~1.25	3.75~4.50	5.00~6.70	4.70~5.20	2.70~3.20	—
	M52	/				0.85~0.95	3.50~4.30	0.75~1.50	4.00~4.90	1.65~2.25	—
	M50	/				0.78~0.88	3.75~4.50	/	3.90~4.75	0.8~1.25	—

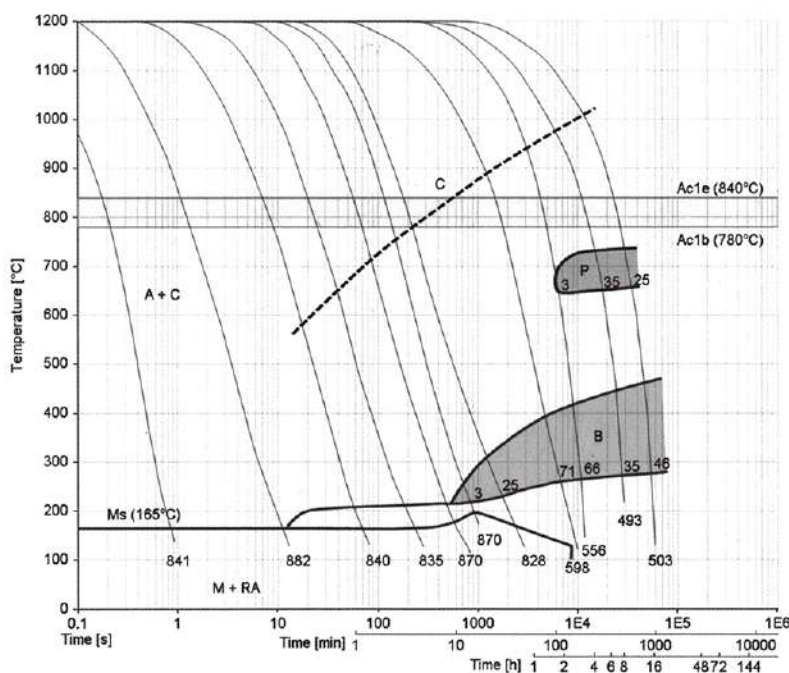

MT35 CCT GRAPH

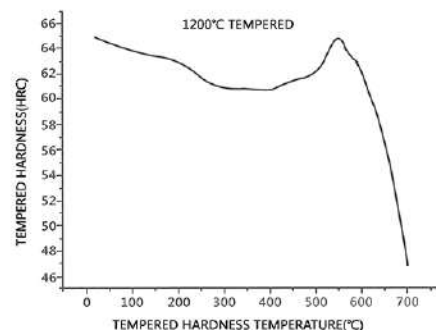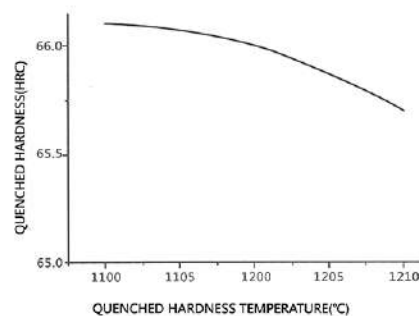

材料选择推荐 RECOMMENDATION OF GRADES

应用Application	耐用等级/切削强度 Durability grade / cutting strength			备注 Remark
	一般 Normal	较高 Higher	高 Top high	
钻头 drill	M2、W9 HYW4	M35、M42	HOP2030	五金钻头宜 (DIY Drills) HYW4, 大规格锥钻宜 (Big Size Taper Shank Drills) HYW6-A
立铣刀 End mill	M2、W9	M42、M2Al	HOPM4、HOPT15	
丝锥 Tap	M2、TM2	M35、HYTV3	HOP2030、HOPM3	HYTV3是3V级易磨削丝锥专用钢
齿轮刀具 Gear cutter	M2	M35、HOPM4、 HSF825K	HOPT15M	剃齿刀 (Gear Shaver) HSF825K 、HOPM4
拉刀 Broach	M2	M32、M42、M2Al、 HSF825K	HOPM4、HOPT15	
车刀 Tool Bit	W9	M42、M2Al	HYT42	
冲压模 Press Mould	M2	M35	HOPM4、HOPT15	

常用工具目标硬度及参考晶粒度推荐范围

TARGET HARDNESS AND RECOMMENDATION OF GRAIN SIZE FOR NORMAL TOOLS

应用Application		目标硬度 Target hardness HRC	参考晶粒度 grain size		回火温度 合格级别 Tempering Degree
名称 Name	规格(mm) Specification		W-Mo系	W系	
直柄钻头 Straight Shank Drill	≤Φ4 > Φ4	62-64 64-66	10.5~12 10~11	不推荐 (Not Recommendation)	≤1.5级 (Grade 1.5)
锥柄钻头 Tape Shank Drill	≤Φ30 > Φ30	63-65 64-66	10~11 9.5~11	不推荐 (Not Recommendation)	
中心钻 Center Drill		63-65	10~11.5	不推荐 (Not Recommendation)	
铣、铰刀类 Miller and Reamer		普通HSS 64-66 高性能HSS-E 65.5-67	10~11	不推荐 (Not Recommendation)	
锯片铣刀 Metal Saw	厚度(Thickness)≤1mm 厚度(Thickness) >1mm	62.5-64.5 63.5-65.5	10.5~12 10~11.5	9.5~11	
车刀 Tool Bit		普通HSS 65-66 高性能HSS-E67-69	9~10.5	8~10	
齿轮刀具 Gear Cutter		普通HSS 64-65.5 M35 64.5-66 M42 66-67 PM 66-68	10~11	不推荐 (Not Recommendation)	
拉刀 Broach		普通HSS 63.5-65 高性能HSS-E 65.5-67	10~11	直径(Size)≤60mm 10~11 直径 > 60mm 不推荐(Not Recommendation)	1级 (Grade 1)
丝锥 Tap		一般 Standard 63-65 管 Pipe63-64 梯形Acme62-64	10.5~11.5	不推荐 (Not Recommendation)	
板牙 Tapping Die		细Fine 61-63 粗Coarse 63-65 梯形 Acme 60-62	10.5~11.5	不推荐 (Not Recommendation)	
滚丝轮 Thread Rolling Die		普通Standard 61-63 高强度Hard 63-65	10.5~11.5	不推荐 (Not Recommendation)	
搓丝板 Screw Plate		61-63	10.5~11.5	不推荐 (Not Recommendation)	

工模具钢 DIE AND TOOL STEEL

热作模具钢 HOT WORK DIE STEEL



1.2344ESR 模具钢
1.2344ESR die steel



1.2344 模具钢
1.2344 die steel



1.2343模具钢
1.2343 die steel

冷作模具钢 COLD WORKING DIE STEEL



Cr12MoV模具钢
Cr12MoV die steel



1.2379(Cr12Mo1V1)模具钢
1.2379(Cr12Mo1V1) die steel



SKD11(Cr12Mo1V) 模具钢
SKD11(Cr12Mo1V) die steel

塑料模具钢 PLASTIC DIE STEEL



1.2311 模具钢
1.2311 die steel



NAK80模块
NAK80 module



1.2738模具钢
1.2738 die steel

工模具钢 DIE AND TOOL STEEL

不锈钢 STAINLESS STEEL



630 不锈钢
630 stainless steel



304 不锈钢
304 stainless steel



420 不锈钢
420 stainless steel

合金结构钢 CARBON STEEL



42CrMo4Q+T 合金结构钢
42CrMo4Q+T Alloy structural steel



16/20MnCrS5 合金结构钢
16/20MnCrS5 Alloy structural steel



S355J2G3 合金结构钢
S355J2G3 Alloy structural steel

高速工具钢 HIGH SPEED STEEL



M2 高速钢板材
M2 SHEET



M42 高速钢扁钢
M42 FLAT BAR



M35 高速钢圆钢
M35 Round Bar



卧式带锯床

生产设备及参数

PRODUCTION EQUIPMENT AND PARAMETERS

卧式带锯床

参数名称	参数内容	内容	单位
加工范围	最大锯削尺寸	500*900	mm
	带锯尺寸	1.3*54*7000	mm
电机参数	电压	3P/AC380	V
	功率	4.8	KW
	满载电流	12.2	A
	控制电压	24 27 36	V

参数名称	参数内容	内容	单位
加工范围	最大锯削尺寸	400*700	mm
	带锯尺寸	1.3*41*5150	mm
电机参数	电压	3-380	V
	功率	4.9	KW
	满载电流	11.5	A
	控制电压	AC 36V DC 24V	V



数控龙门铣床

生产设备及参数

PRODUCTION EQUIPMENT AND PARAMETERS

数控龙门铣床

参数名称	参数内容	内容	单位
尺寸参数	行程	2000*2200*700	mm
	工作台尺寸	2000*1300	mm
	电永磁尺寸	2000*1300	mm
	两立柱间距	1600	mm
	刀尖到台面的距离	60-760	mm
马达参数	X轴传动功率	4	kw
	Y轴传动功率	3	kw
	Z轴传动功率	2	kw
进给速度	X轴速度	50-6000	mm/min
	Y轴速度	50-5000	mm/min
	Z轴速度	10-4000	mm/min
粗铣头参数	功率	26 (1000) 转	kw
	行程	700	mm
	转速	10-1000段	mm/min
	主轴锥度	BT50	bt
精铣头参数	功率	11	kw
	行程	700	mm
	转速	10-600	rpm
其他参数	载重	7	t
	外形尺寸	6200*4100*3600	mm
	整机毛重	17	t
工作精度	X轴向直线度和平行度	0.02mm\m 每增加一米增加0.015mm	
	Y轴向直线度和平行度	0.03mm\m 每增加一米增加0.02mm	
	X轴向和Y轴向的垂直度	0.015mm\400mm 主轴轴向跳动0.01mm	
	其他使用轴之间的垂直度	0.015mm\400mm 主轴轴径向跳动0.01mm	



生产设备及参数

PRODUCTION EQUIPMENT AND PARAMETERS

双头侧面铣床

参数名称	参数内容	内容	单位
加工范围	加工最大	850*850	mm
	加工最小	30*30	mm
	工作台尺寸	550*550	mm
	加工高度	250	mm
双面加工定位精度	0.01/300		mm
双面铣头主轴参数	主轴形式	加工中心精密主轴	
	主轴电机功率	15/8.5	kw
	主轴传动方式	皮带	
	主轴	NT50	nt
	主轴段数	自动变速	段
	主轴转速	0-550	mm
	标准铣刀外径	φ250	mm
	XY轴行程	430	mm
进给参数	工作台传动（前后进刀）	9000	mm/min
	主轴（左右进刀）	9000	mm/min
精度	单边垂直	0.02	mm
	单面刀盘中间误差	0.02	mm
	两面总厚度误差	0.02	mm
机床参数	机床最大载重	1050	kg
	机床重量	11000	kg
	外形尺寸长度	4200	mm
	外形尺寸宽度	3800	mm
	外形尺寸高度	2200	mm




卧轴矩台平面磨床

生产设备及参数

PRODUCTION EQUIPMENT AND PARAMETERS

卧轴矩台平面磨床

参数名称	参数内容		内容	单位
工作台	最大磨削尺寸（宽*长*高）		700*2100*600	mm
	工作台面积（宽*长）		700*2000	mm
	工作台纵向（液动）		200-2000	mm
	工作台速度（无级）		3-27	m/min
	工作台T型槽（槽数*宽度）		3*18	
	工作台承载量（包括电磁吸盘）		1500	kg
磨头参数	磨头最大行程	横向（手动或液动）	750	mm
		垂直（手动）	600	mm
	垂直进给	手动每格	0.01	mm
		手动每转	0.5	mm
	连续进给速度（无极）测量时纵向运动应停止		0.5-5	m/min
	工作台每行和断续进给量（无极变速）		5-25	m/min
	磨头快速机动升降速度		500	m/min
	砂轮轴转速		1440	Rpm
	砂轮尺寸（外径*宽*内径）		φ400*50*φ203	mm
电机功率参数	电机总功率		14.5（16）	kw
	磨头电机功率		11	kw
工作精度	加工表面对基面的平等度	纵向	0.01/500	mm
		横向	0.02	mm
	表面粗糙度		优于Ra0.63	mm

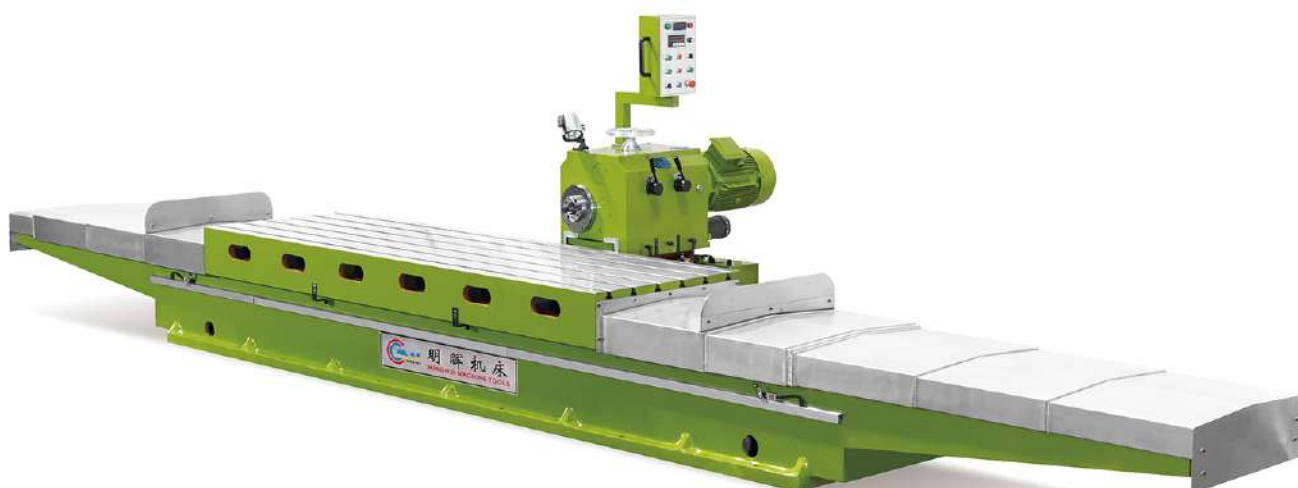


数控卧式铣边机


生产设备参数
PRODUCTION EQUIPMENT AND PARAMETERS

数控卧式铣边机

参数名称	参数内容	内容	单位
加工范围	最大加工长度	1800	mm
	最大加工高度	280/330	mm
工作台	工作台面积	1800*800	mm
	工作台载重	4000	kg
主轴参数	刀盘直径	φ315/ φ350	mm
	主轴转速	160、199、247、305	rpm
	主轴锥度	NT50	nt
	铣头行程	200	mm
电机参数	铣头电机功率	15	kw
	工作台进给电机功率	3	kw
	工作台进给速度	30-3000变频无级调速	mm/min
机床参数	机床重量	4000	kg
	外形尺寸（长*宽*高）	3700*1800*1600	mm
加工精度	0.05-0.1		mm

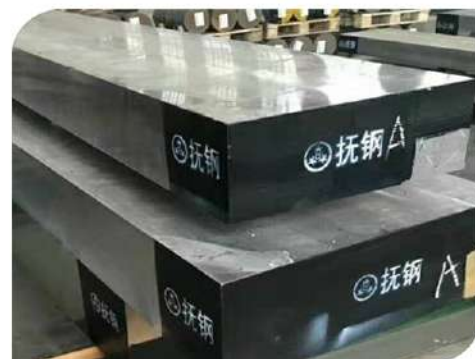


产品展示 PRODUCT

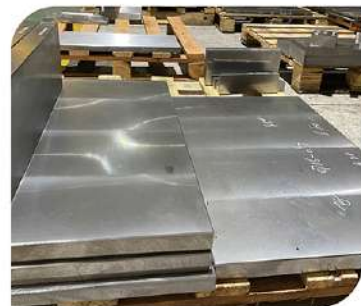

应用领域

PRODUCT CENTER

应用领域 APPLICATION FIELD

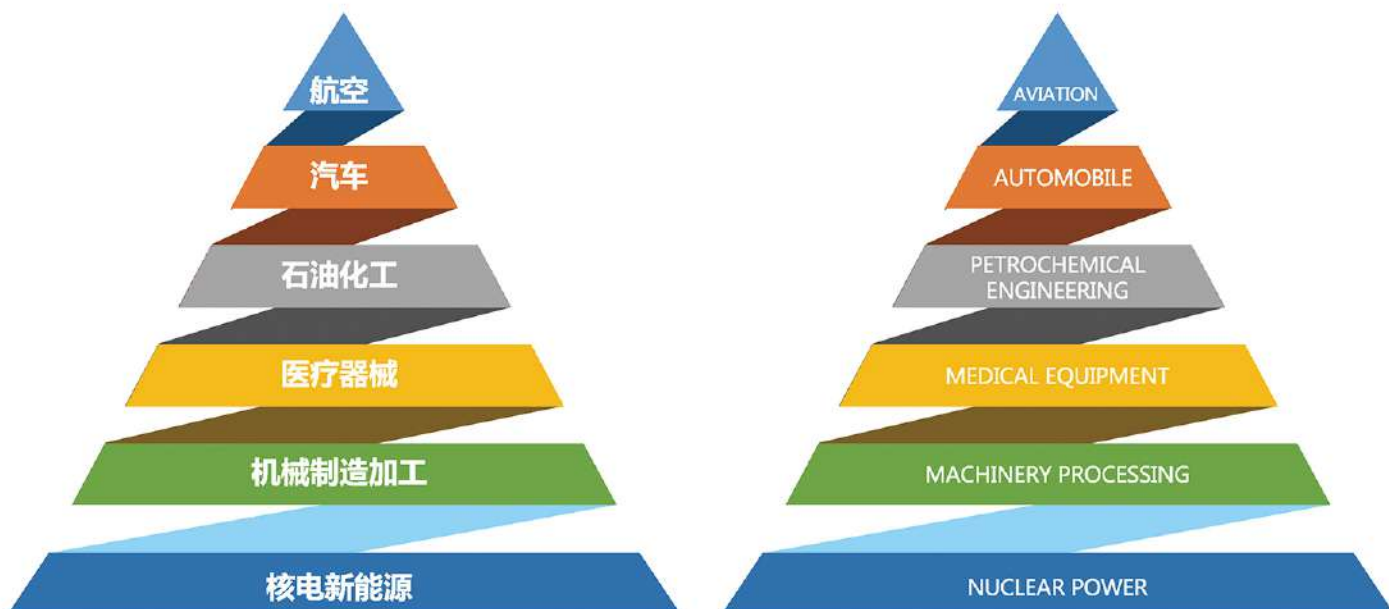

质量把控 QUALITY CONTROL

质量是企业生存之本，在合同签署前，我们将与客户进行全面的信息沟通，以明确产品的用途、标准以及对于质量的特殊要求，并据此与生产工厂签署严格的协议以落实生产。在生产期间，我们有专业的技术人员现场监督工厂生产流程，对产品表面质量、内部质量进行抽检。在产品装运前，我们的检验团队亲临检验产品各项指标，我们同时也可以聘请国际知名第三方检测机构，如SGS、BV、Intertek等，进行严格的质量检测，并再次检验产品外观、尺寸、数量，并对吊装，捆扎加固等情况进行监督，以保证送达客户手中的产品满足客户的要求。

Prior to production, we communicate with customers on information comprehensively to specify product application, standard and special requirements on quality and size and enter them into strict agreement with mill accordingly to implement production. In the process of production, we supervise the production process of mills and conduct sampling inspection on surface and internal quality of products. Prior to shipment, we engage internationally known third party inspection organizations, such as SGS, BV, Intertek, to carry out strict quality inspection and recheck product appearance, dimensions, and quantity, supervise hoisting, bundling up, and reinforcement to guarantee that the delivered products fulfill requirements of customers.



我们的服务 SERVICE

质量把控 QUALITY CONTROL

行远为保证产品质量提高客户满意度，特委托大连大重检测技术服务有限公司作为第三方检验机构，为行远提供检验技术服务



大连市行远国际贸易有限公司
DALIAN FORESIGHT (DF) INTERNATIONAL TRADE CO., LTD.

第三方检测委托协议

Inspection Agency Agreement

为进一步提高我司质量服务水平，我司特委托大连大重检测技术服务有限公司作为第三方检验机构，为我司提供检验技术服务，具体双方责任和义务细节依据服务合同 A83LJ2005001 执行。

In order to further improve the quality and service level of our company, we entrust Dalian Dazhong Testing Technology Service Co., Ltd. as a third-party inspection organization to provide inspection technical services for our company. The details of the responsibilities and obligations of both parties are carried out according to the service contract A83LJ2005001.



大连市行远国际贸易有限公司
Dalian Foresight (DF) International Trade Co., Ltd.
09/06/2024



www.dl-foresight.com

检验检测机构 资质认定证书

证书编号: 18061423B060

名称: 大连大重检测技术服务有限公司

地址: 辽宁省大连市甘井子区新水泥路78号

经审查，你机构已具备国家有关法律、行政法规规定的基本条件和能力，现予批准，可以向社会出具具有证明作用的数据和结果，特发此证。资质认定包括检验检测机构计量认证。

你机构对外出具的检测报告或证书的法律责任由大连大重检测技术服务有限公司承担。

许可使用标志



18061423B060

发证日期: 2024年2月27日
有效期至: 2024年12月29日
发证机关: (Red circular stamp of the issuing authority)

本证书由国家认证认可监督管理委员会监制，在中华人民共和国境内有效。



质量把控 QUALITY CONTROL



In order to further improve the quality and service level of our company, we entrust Dalian Dazhong Testing Technology Service Co., Ltd. as a third-party inspection organization to provide inspection technical services for our company.

我们的服务 SERVICE

售后服务 AFTER-SALE SERVICE



从公司创立至今，行远国际坚守诚信原则，视诚信为企业生命，依托于我们专业的技术能力，我们将严格按照合同条款履行相应售后服务。行远国际同样可以针对合同外的特殊要求对客户提供帮助。

From our establishment till now, DF has adhered to the principle of honesty and consider it as the life of corporate. We perform corresponding after-sale service according to terms of contracts. DF can also help customers with special requirements outside the contract.

物流支持 LOGISTICS SUPPORT

我们提供集装箱、散杂、空运、铁路运输、仓储、国际联运等在内的运输服务，针对客户需求和货物特性，设计合理的运输方式，综合考虑绑扎、加固、配载等安全措施；同时，我们保持与各大航线主流的船东、港口、船代、保险公司等的良好合作关系，在主要航线通过规模效应及长期稳定的货物运输需求带来物流的及时运输保障和物流价格优势；为客户提供安全、高效、实惠的全方位的综合物流服务。

We provide transportation service including container, break bulk, air transport, rail transport, warehousing, international combined transport, and design reasonable transportation methods in connection with customer demand as for cargo characteristics and with comprehensive consideration on safety measures such as lashing, securing, and stowage. We also maintain good cooperative relationship with mainstream ship owners, ports, shipping agents and insurance companies for major shipping lines, bring on-time transportation guarantee with price advantage in logistics through scale efficiency long-term steady cargo transportation demands, safe, efficient, comprehensive logistics services at low price.



我们的服务 SERVICE

合作伙伴 BUSINESS PARTNERS

我公司销售范畴广泛，覆盖包括中东、台湾、日韩、欧洲、南美在内的多国顾客提供可靠的钢铁贸易服务；并仍在逐步扩展。

另外，我们拥有一批值得信赖和声誉良好的合作伙伴，包括客户、钢厂、银行、物流公司、保险公司、商检公司、管理咨询公司等。



合作伙伴 BUSINESS PARTNERS

We have a group of reliable and reputable business partners, including clients, steel mills, banks, logistics companies, insurance companies, commodity inspection companies, management consulting companies.

我们的服务 SERVICE

合作伙伴 BUSINESS PARTNERS

SERVICE


我们的服务

合作伙伴 BUSINESS PARTNERS

我们的服务 SERVICE

销售网络 SALES NETWORK

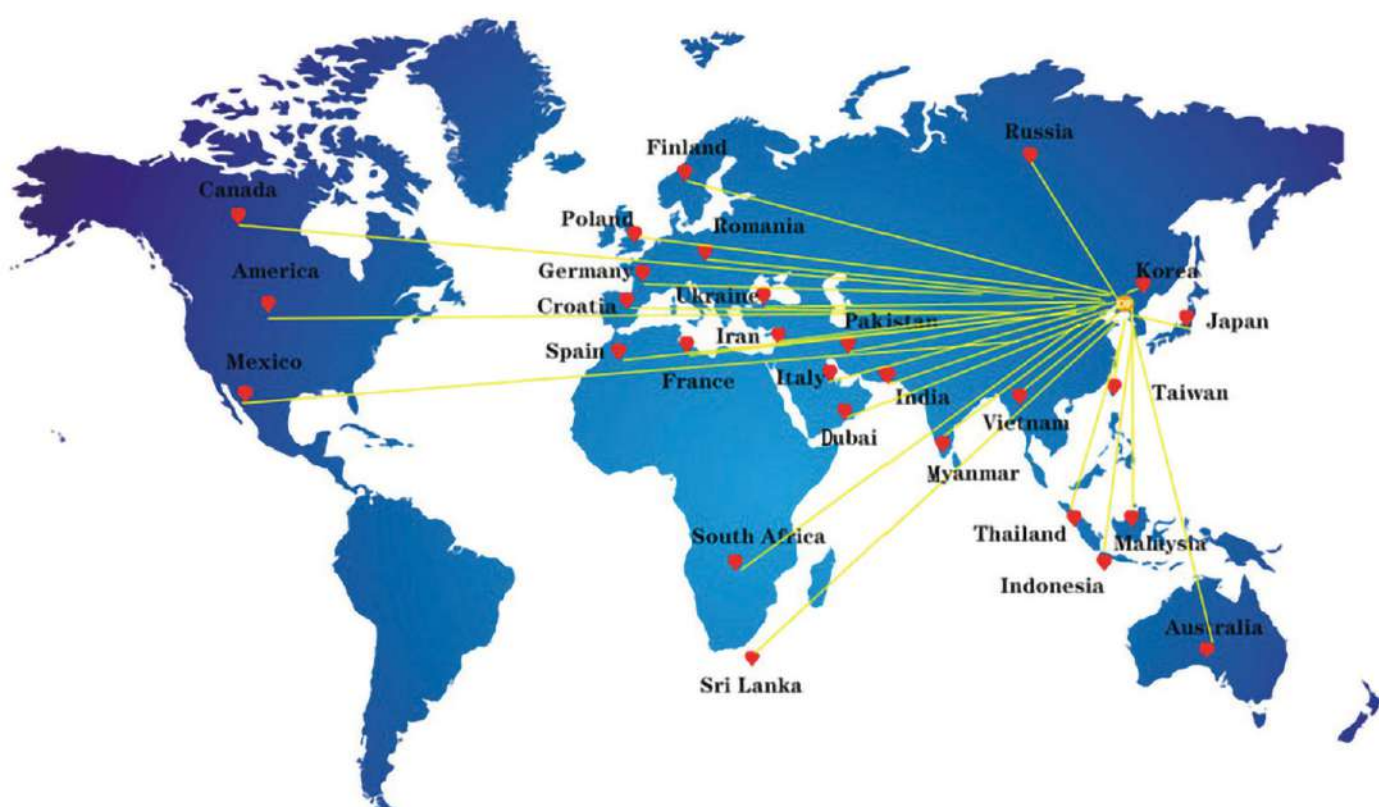

东北特钢集团授权指定代理商，抚顺特钢授权经销商

The DongBei Special Steel Group Co., Ltd. authorized the designated agent .
the authorized dealer of Fushun Special Steel.



CERTIFICATE OF AUTHORIZATION


We hereby authorize DALIAN FORESIGHT (DF) INTERNATIONAL TRADE CO., LIMITED as franchised dealer for the products in Vietnam market only:

TOOL AND DIE STEEL ROUND BAR AND FLAT BAR

Note: FUSHUN SPECIAL STEEL CO., LTD. is affiliated to DONGBEI SPECIAL STEEL GROUP CO., LTD.

Issued by: DONGBEI SPECIAL STEEL GROUP CO., LTD.
DONGBEI SPECIAL STEEL GROUP CO., LTD.
Valid until: 1st May 2020
有效期: 2020年1月1日 - 2020年12月31日

NO. 118888 SOUTH ROAD, DONGBEI WANG INDUSTRIAL ZONE, JIANGSU PROVINCE, CHINA

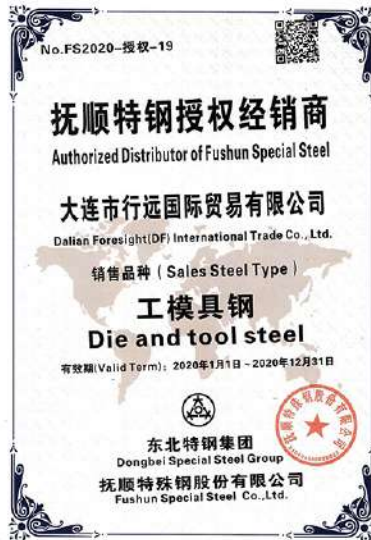

大连行远于2020年通过中质协ISO9001质量管理体系认证

DF has acquired ISO9001 quality management system certification issued by the quality Assurance Center of the China



对外贸易经营者备案登记表	
备案登记机构编号: 519221016	企业登记注册代码: 1110282800008303
经营单位中文名称: 大港市江润昌贸易有限公司	
经营单位英文名称: Daxin Jiarunchang Import and Export Trade Co., Ltd.	
组织机构代码:	经营单位类型: 有限责任公司
住 所: 辽宁省大连市甘井子区大港街道	
经营范围 (中文): 辽宁省对外贸易货物进出口	
经营范围 (英文): Major's & J's Inc. Trade Trading; MG's & J's Importing/Exporting; Nonfood Arise/Export/China P.R.C.	
联系电话: 18040557335	联系传真: 94114059069
邮箱地址: 110001	电子邮箱: yujianyan_songsong@foxmail.com
工商登记注册日期: 2016-03-28	工商登记注册号:
依法办理工商登记的企业填报请填写以下内容	
企业法定代表人姓名: 王 强	身份证号码: 210682197006020221
注册资本: 壹佰万元	(经备案)
依法办理工商登记的外商 (地区) 企业或个体工商户 (经营单位) 请填写以下内容	
企业注册地/个人/个体工商户负责人姓名:	身份证号码:
营业执照/个人房产:	(经备案)
备注:	
请表前填写并阅读清楚条款。并加盖公章或企业或个人工商负责人签字。盖章。	
备案机构名称: 大连市商务局	
年 月 日	

104543

請收據，請立即填妥下列資料並向商務印行登記處繳納註冊費及地稅。
Please cut along the dotted line after making payment and display the valid business/trade registration certificate at business address.

通事 COMMUNAL 商業登記證號碼 XXXXXXXXXXXX	商標 FOREIGN (商標註冊號碼) (第 136 號) BUSINESS REGISTRATION CERTIFICATE (Chapter 116) (商業登記證) BUSINESS REGISTRATION REGULATIONS (商業登記條例) 註冊商標 XXXXXX Registration Certificate	第 1 頁 (共) [] 頁 通事 / 註冊印人 Name of Director/Company 地址 / 分行地址 Address Branch Name 電話 / 地址 Phone / Address 稅務局 Inland Revenue 註冊公司 Name of Company 註冊日期 Date of Registration 01/12/2001 01/12/2020
---	--	--



DALIAN FORESTKING (HK) INTERNATIONAL
 TRADE CO., LIMITED

 UNIT A (RM 9) 3/F CHEONG SUN
 TOWER 116-118 WING LOK ST
 SIKKING WING
 HK
 特殊鋼材及鋼材技術出口 / 橡膠製品、五金電鍍

 BODY CORPORATE

營業日期
Date of Commencement
01/12/2001

營業期限
Date of Expiry
02/12/2020

登記註冊號碼
Certificate No.
70419549-000-12-19-2

登記註冊費
Fee and Levy
\$150
 (徵費 FEE = \$ 6)
 (徵費 LEVY = \$296)

請注意下列「有關登記條例」的規定：

Please note the following regulations of the Business Registration Ordinance:

- 第 11 條規定註冊人須按規章繳納註冊費及地稅。
Section 11 provides that the owner of a business registration certificate is a branch registration certificate shall not be deemed to be a branch registration certificate unless the requirements of any law in relation to such business or to the person carrying on the same or employees have been complied with.
- 第 12 條規定各業經營者須將其有效的商業登記證及地稅的分別登記證於每一營業地點展示。
Section 12 provides that valid business registration certificate and valid branch registration certificate shall be displayed at every address where business is carried on.

繳納註冊費及地稅後，商業登記證及地稅納稅憑收將寄交公司。如你欲換領，本商業登記證須於每月向稅務局繳納 \$200 登記費 (換領費及地稅納稅憑收除外)。
After making the certificate and landward fee initial at time of payment, this document will only become a valid business registration certificate upon payment. (Please not the payment instructions outside.)

換領時須繳納登記費及地稅。RENEWED FEE AND LAND LEVY MUST BE PAID AT REVENUE OFFICE.

01/01/2021 01/12/2025 5638556 975032 000

\$250.00

”

行之有效，远见卓识
EFFECTIVE AND FORESIGHT

